

Notes:

1- Trees shall be of quality prescribed in crown observations and root observations details and specifications.

2- See specifications for further requirements related to this detail.

Trunk caliper shall meet ANSI Z60 current edition for root ball size.

Root ball modified as required.

Round-topped soil berm 4" high x 8" wide above root ball surface shall be constructed around the root ball. Berm shall begin at root ball periphery.

Existing soil.

Slope sides of loosened soil.

Bottom of root ball rests on existing or recompacted soil.

Central leader. (See crown observations detail).

Top of root ball shall be flush with finished grade.


Prior to mulching, lightly tamp soil around the root ball in 6" lifts to brace tree. Do not over compact. When the planting hole has been backfilled, pour water around the root ball to settle the soil.

Loosened soil. Dig and turn the soil to reduce compaction to the area and depth shown.

4" layer of mulch. No more than 1" of mulch on top of root ball. (See specifications for mulch).

Finished grade.

Planting hole shall be 3x the largest dimension of the root ball.

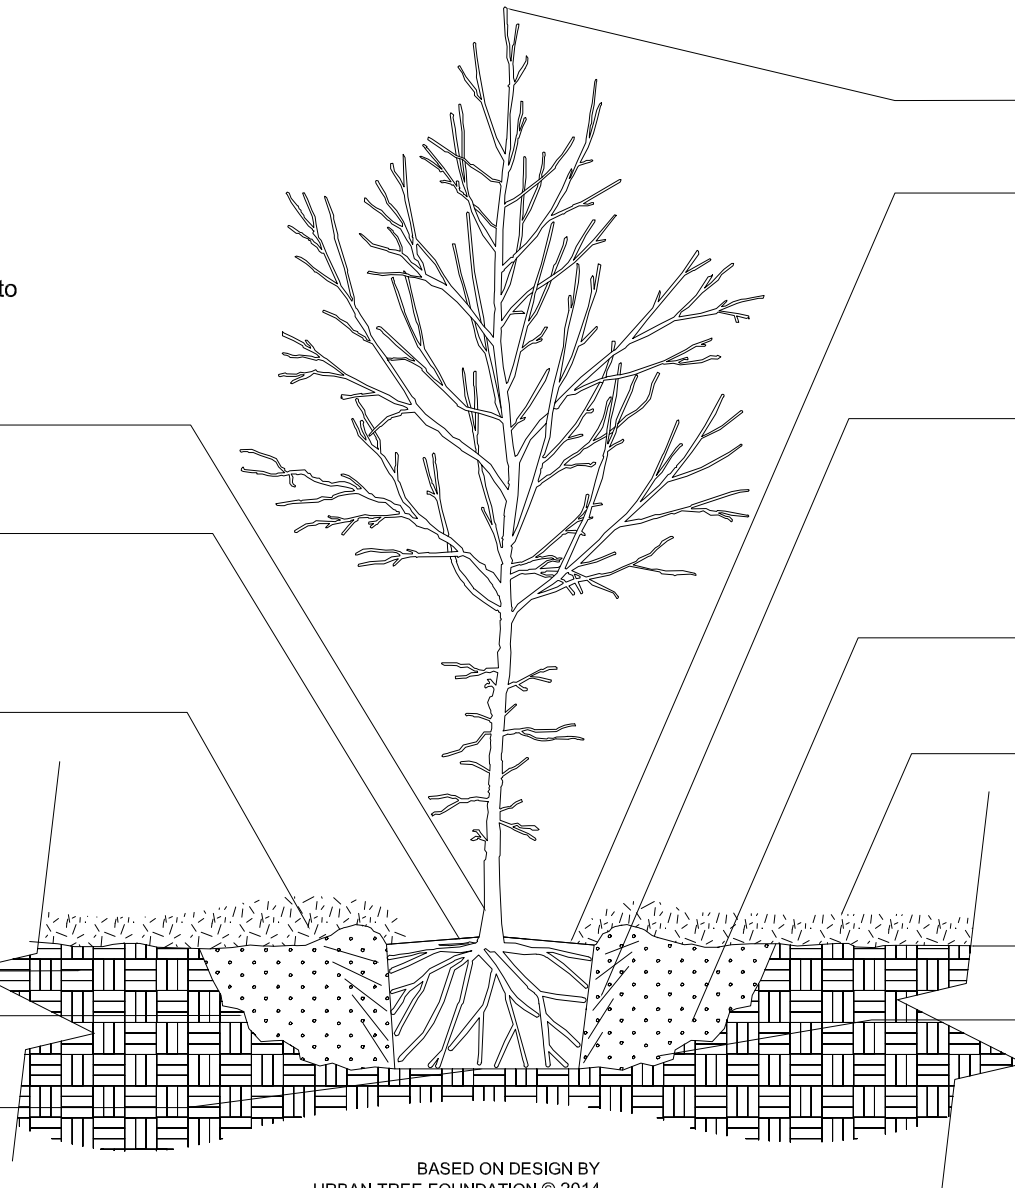

BASED ON DESIGN BY
URBAN TREE FOUNDATION © 2014

Not To Scale

REVISIONS

NO.	DATE:		
1	4/20/2023		

TREE ON SLOPE PLANTING DETAIL

DRAWING

VS-8

PAGE

XXX



*The Town of
Leesburg in Virginia*