




Article # X-XXX.X

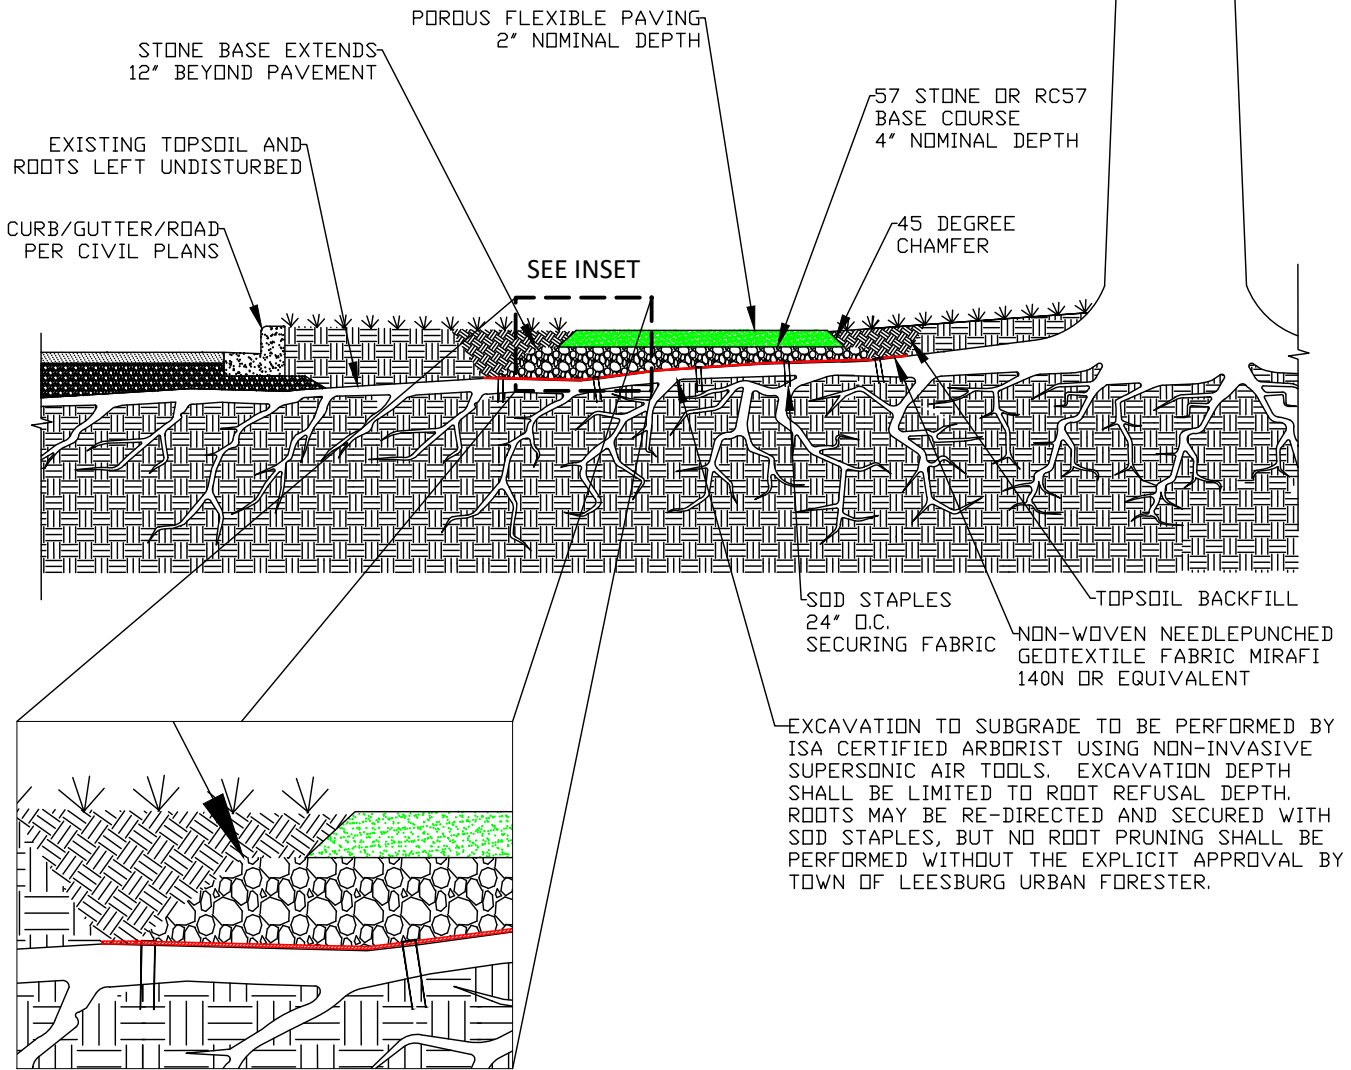

**NOTES:**

1. POROUS FLEXIBLE PAVING (PFP) SHALL CONSIST OF 50% 1-5MM COLORED SBR CRUMB RUBBER & 50%  $\frac{3}{8}$ " TRIPLE WASHED & KILN DRIED AGGREGATE BOUND WITH SINGLE COMPONENT MOISTURE CURED ELASTOMERIC POLYURETHANE BINDER.
2. PFP SHALL BE MIXED ONSITE, POURED CONTINUOUSLY AND MONOLITHICALLY, THEN SCREEDED, FLOATED AND TOWELED CREATING A UNIFORM SMOOTH FINISH WITH NO TOOL MARKS OR VISIBLE SEAMS.

**Not To Scale**

REVISIONS			
NO.	DATE:		

TYPICAL  
**POROUS FLEXIBLE PAVING  
TREE FRIENDLY SIDEWALK  
DETAIL**

DRAWING  
**VS-14**  
  
PAGE  
**XXX**